


# AIR OPERATED DOUBLE DIAPHRAGM PUMPS

CENTRAL FLOW DESIGN PUMPS



UNIVERSAL DESIGN PUMPS

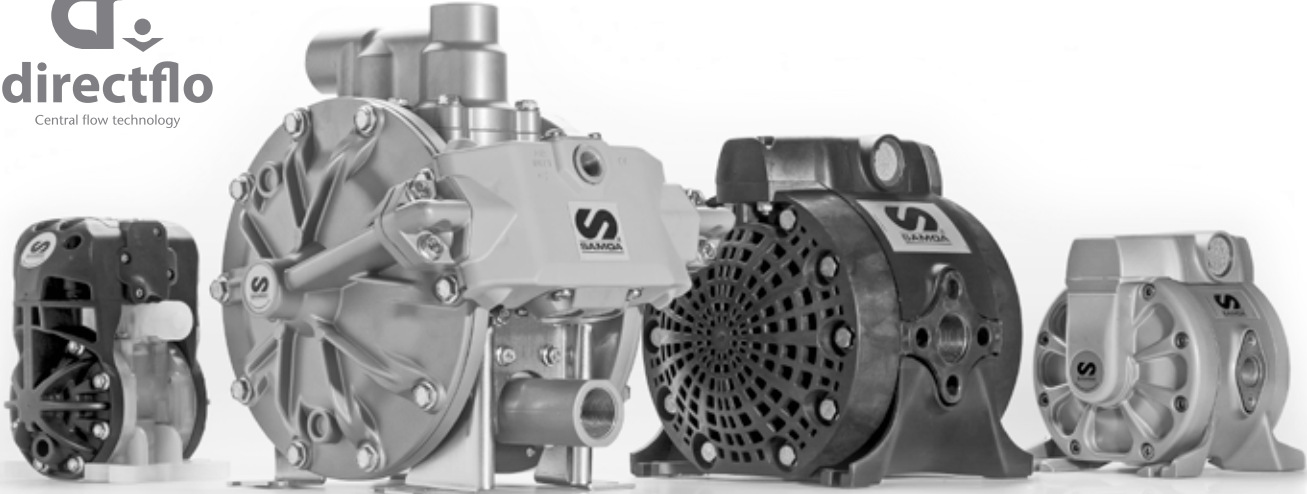


# AIR OPERATED DIAPHRAGM PUMP RANGE

## PLASTIC PUMPS

Plastic Directflo® and Universal Pivot pump fluid bodies are compatible with even the most aggressive chemicals. Air sections (air chambers and housings) are suitable for use in corrosive environments.



	DC20	DF30	DF50	DF100
<b>Pressure ratio</b>	1:1	1:1	1:1	1:1
<b>Maximum free delivery<sup>(1)</sup></b>	5 US gal/min (20 l/min)	10 US gal/min (38 l/min)	14 US gal/min (50 l/min)	28 US gal/min (100 l/min)
<b>Delivery per stroke approx.<sup>(1)(2)</sup></b>	0.008 US gal (0,03 litres)	0.02 US gal (0,07 litres)	0.026 US gal (0,1 litres)	0.07 US gal (0,25 litres)
<b>Delivery per cycle (2 x strokes)<sup>(1)(2)</sup></b>	0.016 US gal (0,06 litres)	0.04 US gal (0,14 litres)	0.05 US gal (0,2 litres)	0.13 US gal (0,5 litres)
<b>Air pressure operating range</b>	22 to 100 psi (1,5 to 7 bar)	22 to 115 psi (1,5 to 8 bar)	22 to 115 psi (1,5 to 8 bar)	22 to 115 psi (1,5 to 8 bar)
<b>Solids in suspension max. size</b>	3/32" (2 mm)	1/8" (3 mm)	1/8" (3 mm)	3/16" (4 mm)
<b>Maximum dry suction lift<sup>(1)</sup></b>	6 1/2' (2 m)	13' (4 m)	20' (6 m)	15' (4,5 m)
<b>Maximum wet suction lift<sup>(1)</sup></b>	23' (7 m)	26' (8 m)	26' (8 m)	23' (7 m)
<b>Weight</b>	2.65 lb (1,2 kg)	4.19 lb (1,9 kg)	4.85 lb (2,2 kg)	11.24 lb (5,1 kg)
<b>Fluid inlet connection</b>	Int.: 1/4" NPT/ BSP (F) Ext.: 3/4" NPT (M)	1/2" NPT/ BSP (F)	1/2" NPT/ BSP (F)	1" NPT/ BSP (F)
<b>Fluid outlet connection</b>	Int.: 1/4" NPT/ BSP (F) Ext.: 3/4" NPT (M)	1/2" NPT/ BSP (F)	1/2" NPT/ BSP (F)	1" NPT/ BSP (F)
<b>Air inlet connection</b>	3/8" NPSM (F)	3/8" NPSM (F)	3/8" NPSM (F)	3/8" NPSM (F)

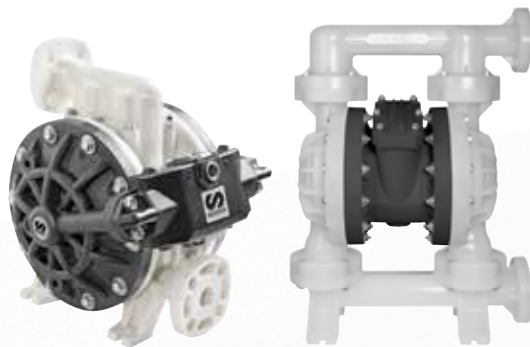


	DP200	UP20
<b>Pressure ratio</b>	1:1	1:1
<b>Maximum free delivery<sup>(1)</sup></b>	53 US gal/min (200 l/min)	172 US gal/min (650 l/min)
<b>Delivery per stroke approx.<sup>(1)(2)</sup></b>	0.13 US gal (0,5 litres)	0.68 US gal (2,55 litres)
<b>Delivery per cycle (2 x strokes)<sup>(1)(2)</sup></b>	0.26 US gal (0,1 litres)	1.35 US gal (5,1 litres)
<b>Air pressure operating range</b>	22 to 115 psi (1,5 to 8 bar)	22 to 100 psi (1,5 to 7 bar)
<b>Solids in suspension max. size</b>	1/4" (6 mm)	1/4" (6 mm)
<b>Maximum dry suction lift<sup>(1)</sup></b>	16' (5 m)	16' (5 m)
<b>Maximum wet suction lift<sup>(1)</sup></b>	26' (8 m)	26' (8 m)
<b>Weight</b>	23.15 lb (10,5 kg)	62 lb (28 kg)
<b>Fluid inlet connection</b>	1" DIN PN-10 DN25 flange and ANSI B16.5 1" 150 lb flange	2" ANSI/DIN. Side ends
<b>Fluid outlet connection</b>	1" DIN PN-10 DN25 flange and ANSI B16.5 1" 150 lb flange	2" ANSI/DIN. Side ends
<b>Air inlet connection</b>	3/8" NPSM (F)	3/4" NPT (F)


(1) Data measured with water, air inlet pressure 100 psi (7 bar) with DC models 115 psi (8 bar) with DF and DP models), 68 °F (20 °C) and flooded fluid inlet.  
 (2) Approximate value; real value may vary depending on working conditions, fluid pumped and pump materials.

## METAL PUMPS

**Metal Directflo®** and **Universal Pivot** models handle a wide range of materials.

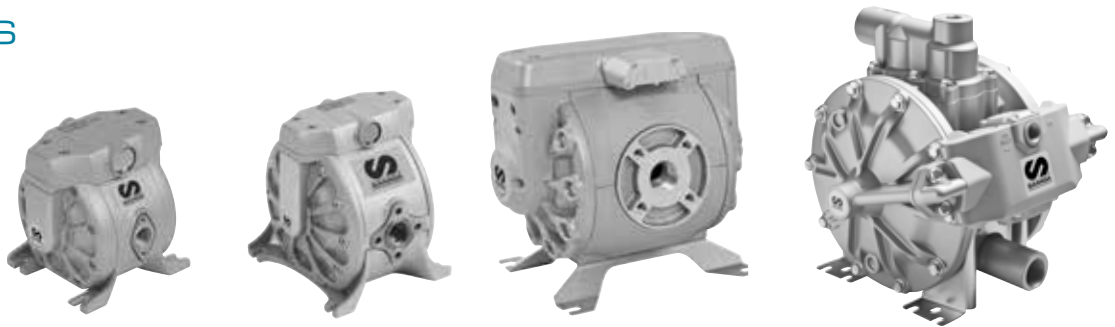

	DF50	DF100	DF250	DP200
<b>Pressure ratio</b>	1:1	1:1	1:1	1:1
<b>Maximum free delivery<sup>(1)</sup></b>	14 US gal/min (50 l/min)	28 US gal/min (100 l/min)	66 US gal/min (250 l/min)	53 US gal/min (200 l/min)
<b>Delivery per stroke approx.<sup>(1) (2)</sup></b>	0.026 US gal (0,1 litres)	0.07 US gal (0,25 litres)	0.16 US gal (0,6 litres)	0.13 US gal (0,5 litres)
<b>Delivery per cycle (2 x strokes)<sup>(1) (2)</sup></b>	0.05 US gal (0,2 litres)	0.13 US gal (0,5 litres)	0.32 US gal (1,2 litres)	0.26 US gal (1 litres)
<b>Air pressure operating range</b>	22 to 115 psi (1,5 to 8 bar)	22 to 115 psi (1,5 to 8 bar)	22 to 115 psi (1,5 to 8 bar)	22 to 115 psi (1,5 to 8 bar)
<b>Solids in suspension max. size</b>	1/8" (3 mm)	3/16" (4 mm)	1/4" (6 mm)	1/4" (6 mm)
<b>Maximum dry suction lift<sup>(1)</sup></b>	20' (6 m)	15' (4,5 m)	16,4' (5 m)	16' (5 m)
<b>Maximum wet suction lift<sup>(1)</sup></b>	26' (8 m)	23' (7 m)	26' (8 m)	26' (8 m)
<b>Weight</b>	7.72 lb (3,5 kg)	16 lb (7,2 kg)	45 lb (20 kg)	23.35 lb (11,5 kg)
<b>Fluid inlet connection</b>	1/2" NPSM (F)	1" NPT/ BSP (F)	1 1/2" NPT (F) and ANSI 1" B16.5 150 lb flange or 1 1/2" BSP (F) and DIN PN-10 DN40 flange	1" NPT/ BSP (F)
<b>Fluid outlet connection</b>	1/2" NPSM (F)	1" NPT/ BSP (F)	1 1/2" NPT (F) and ANSI 1" B16.5 150 lb flange or 1 1/2" BSP (F) and DIN PN-10 DN40 flange	1" NPT/ BSP (F)
<b>Air inlet connection</b>	3/8" NPSM (F)	3/8" NPSM (F)	1/2" NPSM (F)	3/8" NPSM (F)

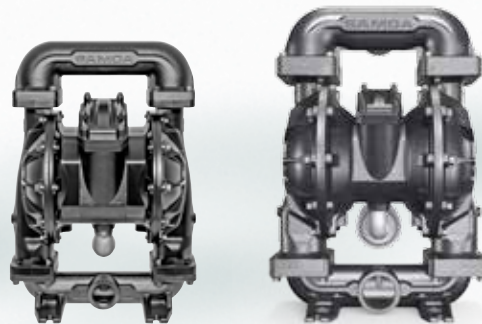

	UP20	UP30
<b>Pressure ratio</b>	1:1	1:1
<b>Maximum free delivery<sup>(1)</sup></b>	172 US gal/min (650 l/min)	264 US gal/min (1,000 l/min)
<b>Delivery per stroke approx.<sup>(1) (2)</sup></b>	0.68 US gal (2,55 litres)	1.3 US gal (5,1 litres)
<b>Delivery per cycle (2 x strokes)<sup>(1) (2)</sup></b>	1.35 US gal (5,1 litres)	26 US gal (10,2 litres)
<b>Air pressure operating range</b>	22 to 100 psi (1,5 to 7 bar)	22 to 100 psi (1,5 to 7 bar)
<b>Solids in suspension max. size</b>	1/4" (6 mm)	1/2" (127 mm)
<b>Maximum dry suction lift<sup>(1)</sup></b>	16' (5 m)	19.7' (6 m)
<b>Maximum wet suction lift<sup>(1)</sup></b>	26' (8 m)	26.2' (8 m)
<b>Weight</b>	101 lb (46 kg) / 163 lb (74 kg) / 168 lb (76 kg)	150 lb (68 kg) / 270 lb (120 kg)
<b>Fluid inlet connection</b>	2" ANSI/DIN flanged	3" NPT / 3" ANSI/DIN flanged
<b>Fluid outlet connection</b>	2" NPT / 2" ANSI/DIN flanged	3" NPT / 3" ANSI/DIN flanged
<b>Air inlet connection</b>	3/4" NPT (F)	3/4" NPT (F)

(1) Data measured with water, air inlet pressure 100 psi (7 bar) with DC models 115 psi (8 bar) with DF and DP models, 68 °F (20 °C) and flooded fluid inlet.  
 (2) Approximate value; real value may vary depending on working conditions, fluid pumped and pump materials.

# DC PUMPS SERIES

## COMPACT DESIGN



### CENTER FLOW DESIGN

Mini-manifolds for installation flexibility.

### SMALL & COMPACT

Smaller design, produces equivalent to higher flow rate than competitive models.

### UTILIZES UNBALANCED SPOOL VALVE

Operates at lower air inlet pressures.  
Built-in air exhaust muffler, adaptable for remote exhaust installations.

### ADJUSTABLE PORTS

DC20 inlet and outlet ports can be rotated.

### FLOW RATE - 5 US GAL/MIN (20 L/MIN)



**ATEX Certified versions available**  
Ex II2 GD IIB/IIc 95 °C.

## MATERIALS AVAILABLE FOR DC20:

PLASTIC PUMPS	AIR MOTOR	PUMP BODY	DIAPHRAGMS Overmolded	CHECK VALVE SEATS	CHECK VALVE BALLS
	<ul style="list-style-type: none"> <li>Conductive polypropylene</li> </ul>	<ul style="list-style-type: none"> <li>Polypropylene®</li> <li>PVDF</li> <li>Conductive acetal</li> </ul>	<ul style="list-style-type: none"> <li>TPE (Hytre®)</li> <li>Santoprene®</li> <li>PTFE (Teflon®)</li> </ul>	<ul style="list-style-type: none"> <li>Acetal</li> <li>Polypropylene®</li> <li>PVDF</li> </ul>	<ul style="list-style-type: none"> <li>PTFE (Teflon®)</li> </ul>



### DC20

PUMP BODY	MAX FREE FLOW DELIVERY
Plastic	5 US gal/min (20 l/min)

# DF PUMP SERIES

## DIRECTFLO® TECHNOLOGY

### EQUIPPED WITH FRICTIONLESS PIVOT VALVE TECHNOLOGY

Provides fast reciprocal action, minimizing flow pulsation and pump vibration. Contributes to reduce air consumption.

### CENTER FLOW DESIGN

Has no manifolds. Reduced internal pressure loss for improved performance.

### SMALL & COMPACT

Smaller overall size produces equivalent to higher flow rates than competitive models.

### FLEXIBLE INSTALLATION

Ball guides allow DF models to be installed in horizontal and vertical positions, without any loss in flow or suction.

### CAN BE REPAIRED IN-LINE

Easy, quick and cost saving



**FLOW RATE - RANGE FROM A MIN OF 10 US GAL/MIN (38 L/MIN) TO A MAX OF 66 US GAL/MIN (250 L/MIN)**



**ATEX Certified versions available**  
Ex II 2 GD IIB/IIC 95 °C.

## MATERIALS AVAILABLE FOR DF PUMPS:

*\*Not all materials listed are available for all models and sizes. Check materials available to each model.*

	AIR MOTOR	PUMP BODY	DIAPHRAGMS Overmolded	CHECK VALVE SEATS	CHECK VALVE BALLS
<b>METAL PUMPS</b>	<ul style="list-style-type: none"> <li>Aluminum</li> </ul>	<ul style="list-style-type: none"> <li>Aluminum</li> <li>Stainless steel AISI 316</li> </ul>	<ul style="list-style-type: none"> <li>TPE (Hytrel®)</li> <li>Santoprene®</li> <li>Buna-N</li> <li>PTFE (Teflon®)</li> </ul>	<ul style="list-style-type: none"> <li>Stainless steel AISI 316</li> </ul>	<ul style="list-style-type: none"> <li>Acetal</li> <li>Buna-N</li> <li>Stainless steel AISI 316</li> <li>PTFE (Teflon®)</li> </ul>
<b>PLASTIC PUMPS</b>	<ul style="list-style-type: none"> <li>Conductive polypropylene®</li> </ul>	<ul style="list-style-type: none"> <li>Polypropylene®</li> <li>PVDF</li> <li>Conductive acetal</li> </ul>	<ul style="list-style-type: none"> <li>TPE (Hytrel®)</li> <li>Santoprene®</li> <li>PTFE (Teflon®)</li> </ul>	<ul style="list-style-type: none"> <li>Stainless steel AISI 316</li> <li>PVDF</li> </ul>	<ul style="list-style-type: none"> <li>Acetal</li> <li>Stainless steel AISI 316</li> <li>PTFE (Teflon®)</li> </ul>



DF30		DF50		DF100		DF250	
PUMP BODY	MAX FREE FLOW DELIVERY	PUMP BODY	MAX FREE FLOW DELIVERY	PUMP BODY	MAX FREE FLOW DELIVERY	PUMP BODY	MAX FREE FLOW DELIVERY
Plastic	10 US gal/min (38 l/min)	Plastic Metal	14 US gal/min (50 l/min)	Plastic Metal	28 US gal/min (100 l/min)	Metal	66 US gal/min (250 l/min)

# DP PUMP SERIES

## DIRECTFLO® DESIGN WITH ADDITIONAL FLEXIBILITY



### EQUIPPED WITH FRICTIONLESS PIVOT VALVE TECHNOLOGY

Provides fast reciprocal action, minimizing flow pulsation and pump vibration. Contributes to reduce air consumption.

### CENTER FLOW DESIGN

Mini-manifolds for additional installation flexibility

### SMALL & COMPACT

Smaller overall size produces equivalent to higher flow rates than competitive models.

### ADJUSTABLE INLET AND OUTLET PORTS

Increased installation versatility.

### FLOW RATE – UP TO 53 US GAL/MIN (200 L/MIN)



**ATEX Certified versions available**  
Ex II 2 GD IIB/II C 95 °C.


## MATERIALS AVAILABLE FOR DP PUMPS:

	AIR MOTOR	PUMP BODY	DIAPHRAGMS Overmolded	CHECK VALVE SEATS	CHECK VALVE BALLS
<b>METAL PUMPS</b>	<ul style="list-style-type: none"> <li>Aluminum</li> </ul>	<ul style="list-style-type: none"> <li>Aluminum</li> <li>Stainless steel AISI 316</li> </ul>	<ul style="list-style-type: none"> <li>TPE (Hytrel®)</li> <li>Santoprene®</li> <li>Buna-N</li> <li>PTFE (Teflon®)</li> </ul>	<ul style="list-style-type: none"> <li>Aluminum</li> <li>TPE (Hytrel®)</li> <li>Santoprene®</li> <li>Buna-N</li> <li>Stainless steel AISI 316</li> </ul>	<ul style="list-style-type: none"> <li>Acetal</li> <li>Buna-N</li> <li>Stainless steel AISI 316</li> <li>PTFE (Teflon®)</li> </ul>
<b>PLASTIC PUMPS</b>	<ul style="list-style-type: none"> <li>Conductive polypropylene®</li> </ul>	<ul style="list-style-type: none"> <li>Polypropylene®</li> <li>PVDF</li> <li>Conductive acetal</li> </ul>	<ul style="list-style-type: none"> <li>TPE (Hytrel®)</li> <li>Santoprene®</li> <li>PTFE (Teflon®)</li> <li>Buna-N</li> </ul>	<ul style="list-style-type: none"> <li>Acetal</li> <li>TPE (Hytrel®)</li> <li>Polypropylene®</li> <li>Santoprene®</li> <li>Buna-N</li> </ul>	<ul style="list-style-type: none"> <li>Acetal</li> <li>Stainless steel AISI 316</li> <li>PTFE (Teflon®)</li> <li>Buna-N</li> </ul>



**DP200**

DP200	
PUMP BODY	MAX FREE FLOW DELIVERY
Plastic	53 US gal/min (200 l/min)



**DP200**

DP200	
PUMP BODY	MAX FREE FLOW DELIVERY
Metal	53 US gal/min (200 l/min)

# UP PUMP SERIES

## UNIVERSAL PIVOT PUMP

### EQUIPPED WITH FRICTIONLESS PIVOT VALVE TECHNOLOGY

Provides fast reciprocal action, improves pump performance and contributes to reduce air consumption.

### UNIVERSAL DESIGN

The inlet/outlet ports and the pump mounting feet align with top competitive suppliers to make for an easy change.

### ALL BOLTED CONSTRUCTION

Better seal and eliminates pump leaks. Same bolt size for air and fluid housings facilitates maintenance.

### SUPERB ABRASION RESISTANCE

Optimized design manifolds and fluid paths reduce fluid speed and reduce abrasion wear.

FLOW RATE – UP TO 264 US GAL/MIN (600 L/MIN).




**ATEX Certified versions available**  
Ex II 2 GD IIB/II C 95 °C.



## MATERIALS AVAILABLE FOR UP PUMPS:

	CENTER BODY & AIR CHAMBERS	FLUID CHAMBERS & MANIFOLDS	DIAPHRAGMS	Overmolded	CHECK VALVE SEATS	CHECK VALVE BALLS
<b>METAL PUMPS</b>	<ul style="list-style-type: none"> <li>Aluminum</li> <li>Conductive polypropylene with stainless steel air chambers</li> </ul>	<ul style="list-style-type: none"> <li>Aluminum</li> <li>Ductile iron</li> <li>Stainless steel</li> </ul>	<b>Conventional</b> <ul style="list-style-type: none"> <li>Santoprene®</li> <li>TPE (Hytrel®)</li> <li>Buna-N</li> <li>FKM (Viton®)</li> </ul> <b>Two-piece</b> <ul style="list-style-type: none"> <li>PTFE (Teflon® with Santoprene backer)</li> </ul>	<ul style="list-style-type: none"> <li>TPE (Hytrel®)</li> <li>Santoprene®</li> <li>Buna-N</li> <li>PPTFE / EPDM (Bonded)</li> </ul>	<ul style="list-style-type: none"> <li>Aluminum</li> <li>Hardened stainless steel AISI 440</li> <li>TPE (Hytrel®)</li> <li>Santoprene®</li> <li>Buna-N</li> <li>Stainless steel AISI 316</li> <li>PTFE (Teflon®)</li> </ul>	<ul style="list-style-type: none"> <li>Acetal</li> <li>Buna-N</li> <li>Stainless steel AISI 316</li> <li>PTFE (Teflon®)</li> </ul>
<b>PLASTIC PUMPS</b>	<ul style="list-style-type: none"> <li>Conductive polypropylene</li> </ul>	<ul style="list-style-type: none"> <li>Polypropylene</li> <li>PVDF</li> <li>Conductive polypropylene</li> </ul>	<b>Conventional</b> <ul style="list-style-type: none"> <li>Santoprene®</li> <li>TPE (Hytrel®)</li> <li>Buna-N</li> <li>FKM (Viton®)</li> </ul> <b>Two-piece</b> <ul style="list-style-type: none"> <li>PTFE (Teflon® with Santoprene backer)</li> </ul>	<ul style="list-style-type: none"> <li>TPE (Hytrel®)</li> <li>Santoprene®</li> <li>Buna-N</li> <li>PPTFE / EPDM (Bonded)</li> </ul>	<ul style="list-style-type: none"> <li>Polypropylene</li> <li>PTFE (Teflon®)</li> </ul>	<ul style="list-style-type: none"> <li>TPE (Hytrel®)</li> <li>Santoprene®</li> <li>Buna-N</li> <li>PTFE (Teflon®)</li> <li>FKM (Viton®)</li> </ul>

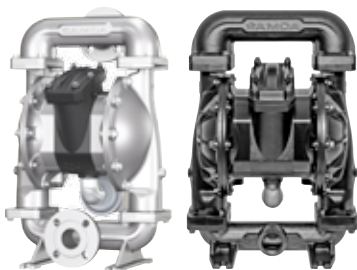

**UP20**

PUMP BODY	MAX FREE FLOW DELIVERY
Metal	172 US gal/min (650 l/min)



**UP20**

PUMP BODY	MAX FREE FLOW DELIVERY
Plastic	172 US gal/min (650 l/min)



**UP30**

PUMP BODY	MAX FREE FLOW DELIVERY
Metal	264 US gal/min (1.000 l/min)



**SAMOA CORPORATION**

NORTH AMERICA  
90 MONTICELLO ROAD  
WEAVERVILLE, NC 28787, USA  
TEL. +1 (828) 645-2290  
FAX: +1 (828) 645-2607

**SAMOA INDUSTRIAL, S.A. - HEADQUARTERS**

SPAIN AND EXPORT MARKETS  
POL. IND. PORCEYO, I-14 - CAMINO DEL FONTÁN, 831  
E-33392 GIJÓN (ASTURIAS), SPAIN  
TEL.: +34 985 381 488  
FAX: + 34 985 147 213

©Copyright, SAMOA Industrial, S.A.

SAMOA Industrial, S.A. is an ISO 9001, ISO 14001  
and ISO 45001 certified company.



**CONTACT US TODAY!**

Visit [www.samoaindustrial.com](http://www.samoaindustrial.com) for more information.